




Bathtubs In-Out  
**AVAS1042Z**

Benedini Associati, 2009

Freestanding bathtub, wide edge



**Finishes**



White Exmar  
**AVAS1042Z**

Round bathtub in white Exmar with overflow hole. Tapware can be positioned on the tub edge, wall mounted or floor standing. It is mandatory to use waste trap .MET0477. (.MET0434 for tubs on display).


For an easier installation of the bathtubs we recommend to use the template for the positioning of the waste trap AKITPZVAS.

Materials used: Exmar.

|                         |                   |                                 |
|-------------------------|-------------------|---------------------------------|
| Height:                 | 64.0 cm           | 25" 1/4 inches                  |
| Diameter:               | 152.5 cm          | 60" inches                      |
| Capacity:               | 520.0 l           | 137 gal                         |
| Weight:                 | 154.0 kg          | 339 lbs                         |
| Packaging measurements: | 166 x 166 x 72 cm | 65"3/8 x 65"3/8 x 28"3/8 inches |
| Weight with packaging:  | 253.0 kg          | 558 lbs                         |




Main dimensions

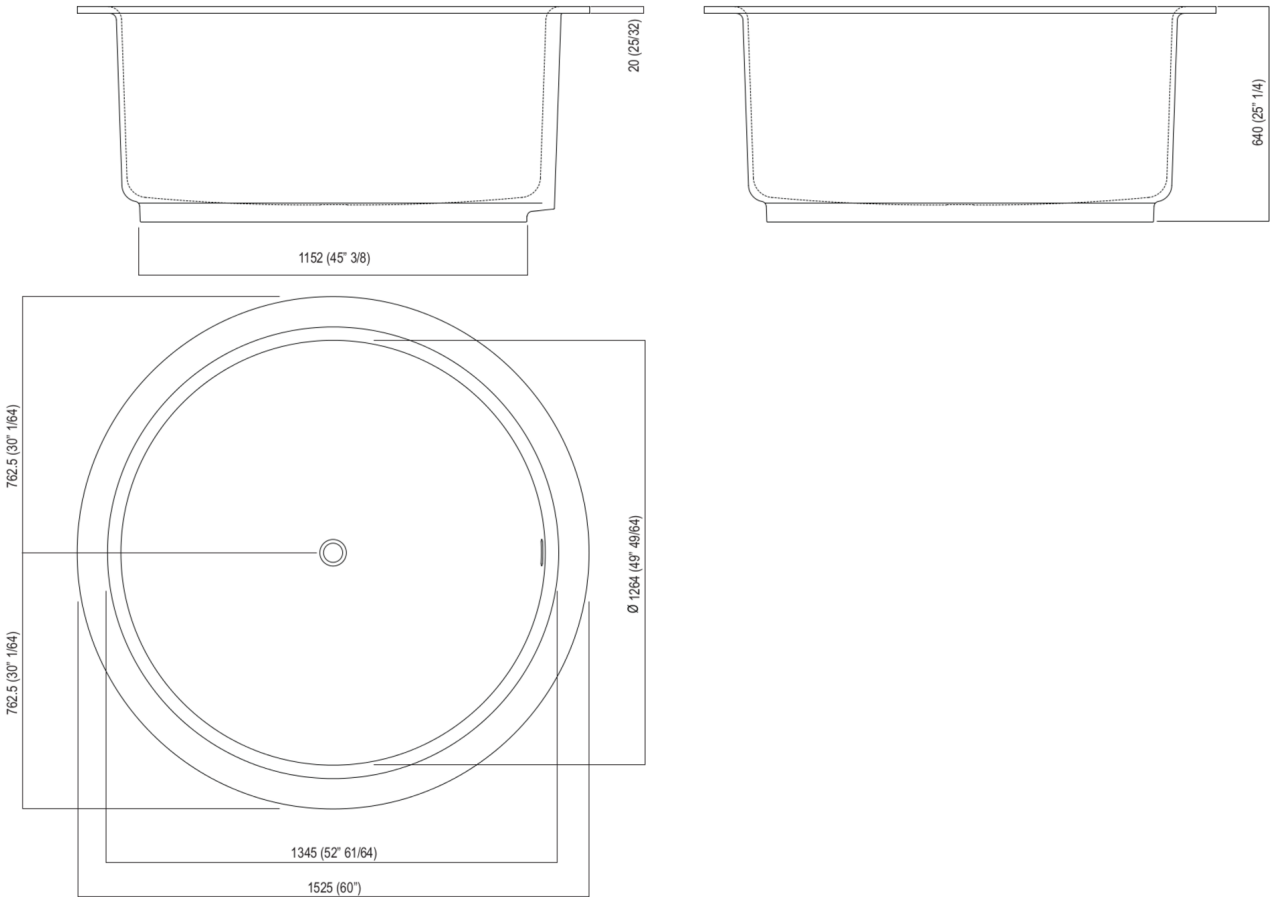




Dimensions for recess

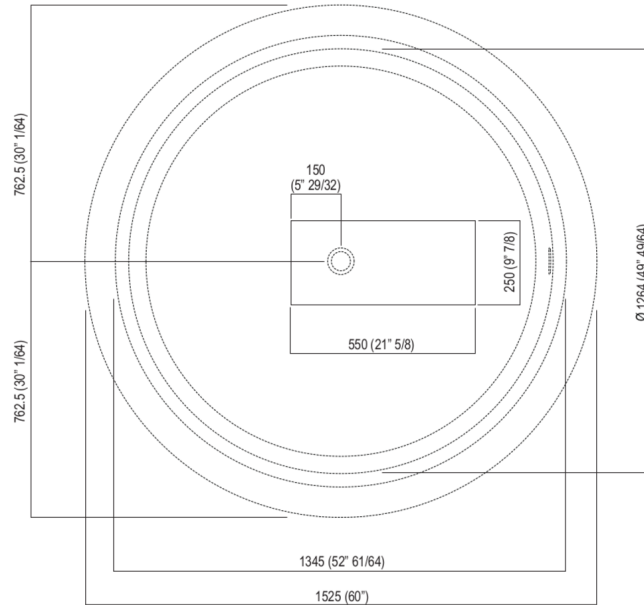



Dimensions for wall mounted taps

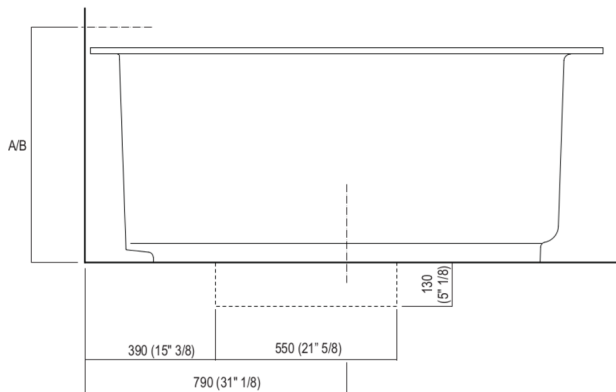


|  | A*                                    | B** |
|--|---------------------------------------|-----|
| FEZ (ARUB050000L, ARUB051000L, ARUB150000C, ARUB151000C, ARUB1089S, ARUB190000C, ARUB191000C, ARUB1091S) | -                                     | -   |
| MEMORY (ARUB1076S, ARUB1077S, ARUB1040S)   | 750 (27 <sup>1</sup> / <sub>2</sub> ) | -   |
| SUITE (ARUB1107S)  | 750 (27 <sup>1</sup> / <sub>2</sub> ) | -   |
| SQUARE (ARUB0932N, ARUB0933N)  | -                                     | -   |
| SEN (ASEN0912V)  | -                                     | -   |

\* inserasse gruppo / axial distance for tap  
 \*\* filo inferiore gruppo / Tap's lower edge




Dimensions for freestanding spouts

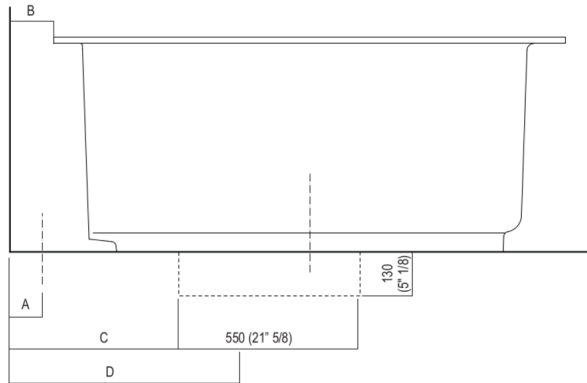

|   | A           | B             | C              | D              |
|---|-------------|---------------|----------------|----------------|
| FEZ (ARUB140, RAUB145, ARUB170N)  | 80 (3" 1/8) | 128 (5" 3/64) | 490 (19" 9/32) | 890 (35" 1/16) |
| MEMORY (ARUB1078, ARUB1072, ARUB1033)   | 80 (3" 1/8) | 128 (5" 3/64) | 490 (19" 9/32) | 890 (35" 1/16) |
| SQUARE (ARUB0961L, ARUB0934L,<br>ARUB0935NL, ARUB0936NL,<br>ARUB0952L, ARUB1024N) | -           | -             | -              | -              |
| SUITE (ARUB1108S)   | -           | -             | -              | -              |
| SEN (ASEN0911)  | -           | -             | -              | -              |



Note

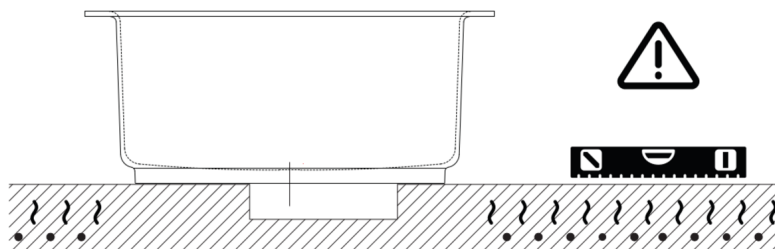

La vasca deve essere installata su un pavimento perfettamente piano.  
The bathtub must be positioned on a flat floor surface.

E' necessario predisporre a pavimento un pozzetto.  
It is necessary to prepare a recess in the floor.

Evitare di realizzare impianti di riscaldamento nell'area sottostante la vasca.  
Avoid the installation of floor heating plants in the area under the bathtub.