


ACER0700Z "SPOON" Lavabo d'appoggio in Cristalplant® / Cristalplant® over top Washbasin .

DATI TECNICI / TECHNICAL DATA




STOP 24 h.

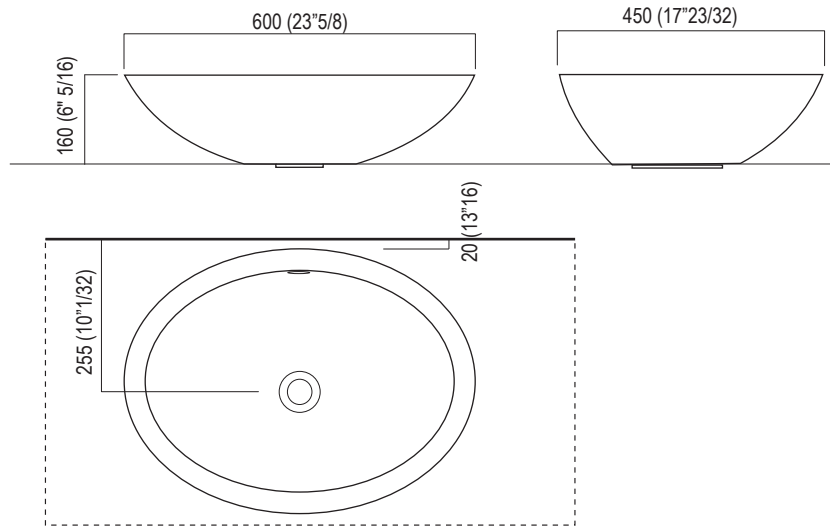

Applicare un adeguato strato di silicone sulla superficie d'appoggio del lavabo. Posizionare il lavabo.

Apply a suitable quantity of silicone to the countertop surface and lower the washbasin into position.

Per tutti i piani autoportanti o freestanding /
For all countertops with concealed wall fixings or freestanding
countertops

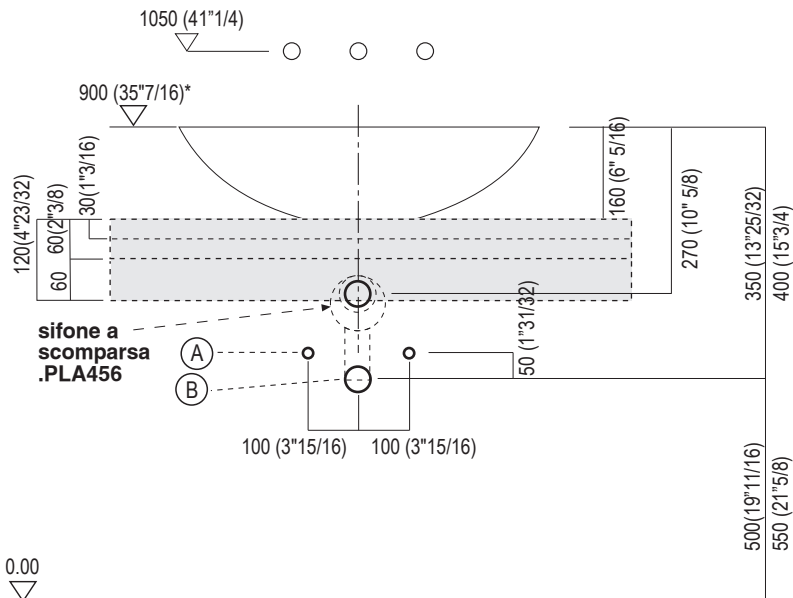

sifone a scomparsa .PLA456


A
B

100 (3 15/16) 100 (3 15/16)

50 (1 31/32)

160 (6 5/16)
270 (10 5/8)
350 (13 25/32)
400 (15 3/4)
500 (19 1/16)
550 (21 5/8)

Per piani con spessore cm 3 e 6 da appoggio /
For countertops to be rested on cabinets with thickness of 3 and 6 cm

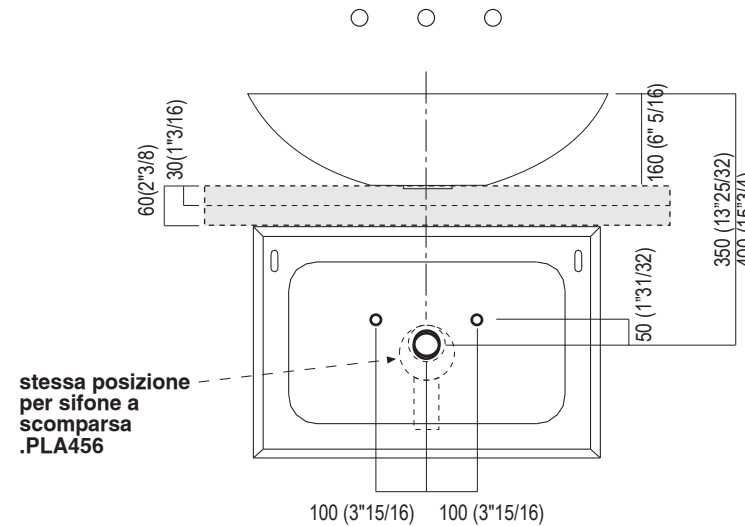

stessa posizione per sifone a scomparsa .PLA456

100 (3 15/16) 100 (3 15/16)

*h.consigliata / advised h.

A - Adduzione acqua / Water mains

B - Scarico / Water discharge