

LAYING TIPS

DIN BY KONSTANTIN GRCIC


Mutina



Make sure that all surfaces are perfectly flat. Also, make sure that the corners and edges of any structures are suitably bevelled to adapt to the special pieces.



Before installation, verify the dimension of all elements, trying to compensate and divide harmoniously any difference between plain tiles and special pieces.

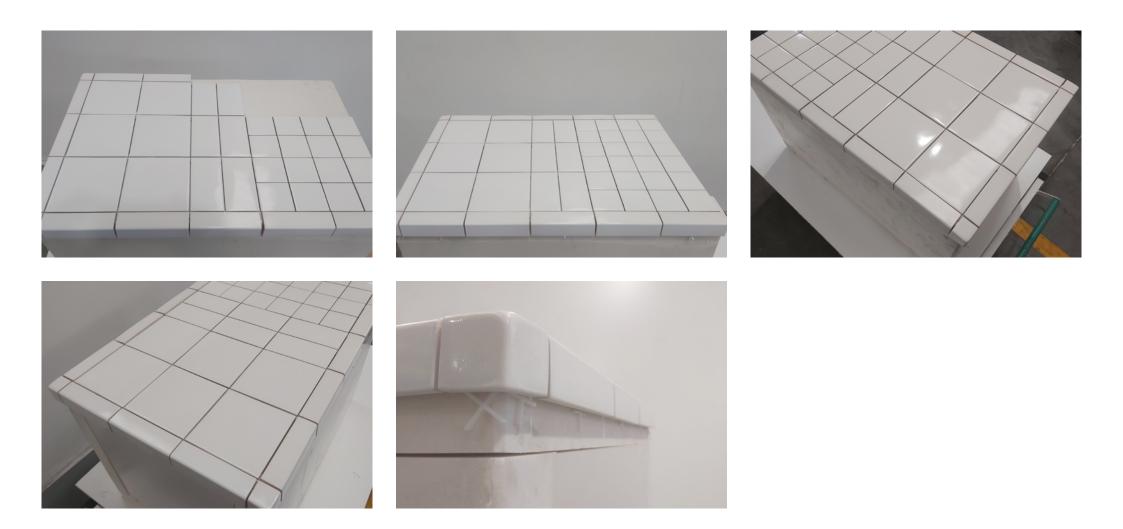

Compose the tiling without using glue. Be sure to consider the thickness of the adhesive.





Align the joints properly, dividing them where necessary. Before proceeding with the installation, make sure that the tiling layout has the desired aesthetic effect.



Apply the adhesive with a 5 mm notched trowel, even on corners and edges. Apply the adhesive on all the pieces that are going to be laid. The amount used should allow to adjust the thickness and divide the joints.



Proceed with the installation, always doing a double layer of adhesive and aligning all joints.




Use a grout of your choice to fill all the joints.





Rinse with water or products suitable for the chosen grout. Make sure to strictly comply with the instructions on the technical data sheet of the product used.

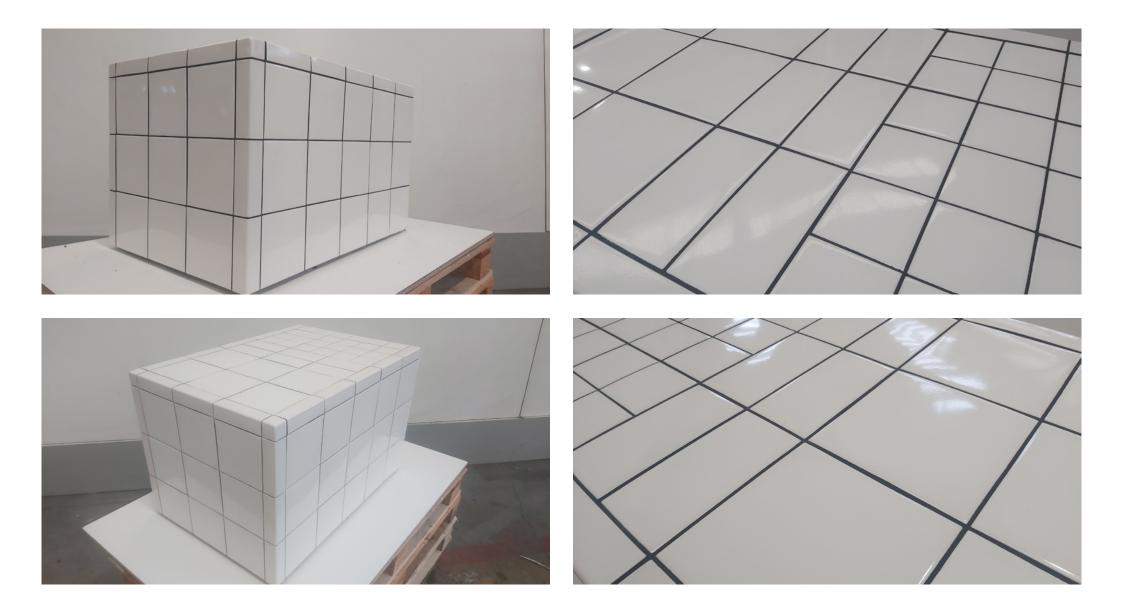



mutina.it



